

## INSTALLATION INSTRUCTIONS

### SUBJECT: CUMMINS COOLING FAN AND CLUTCH PIGTAIL (2003-2012)

FPE-2023-103  
September, 2023  
Page 1 of 1

**FITMENT:** 2003-2007 5.9L and 2007.5-2012 6.7L Cummins Equipped Dodge Ram  
2500/3500 Pickup Trucks  
**KIT P/N:** FPE-HAR-CUMM-CF-0312


**EST INSTALL TIME:** 30 minutes to 1 hour

**TOOLS REQUIRED:** Wire Cutters, Wire Stripper, Wire Crimper, Heat Gun



**STEP 1:** Ensure that the vehicle is parked on a flat and level surface. Disconnect the battery terminals.

**STEP 2:** Locate the OE fan clutch connector. The connector is located on the driver's side of the vehicle next to the front corner of the engine oil pan. See the image to the right.

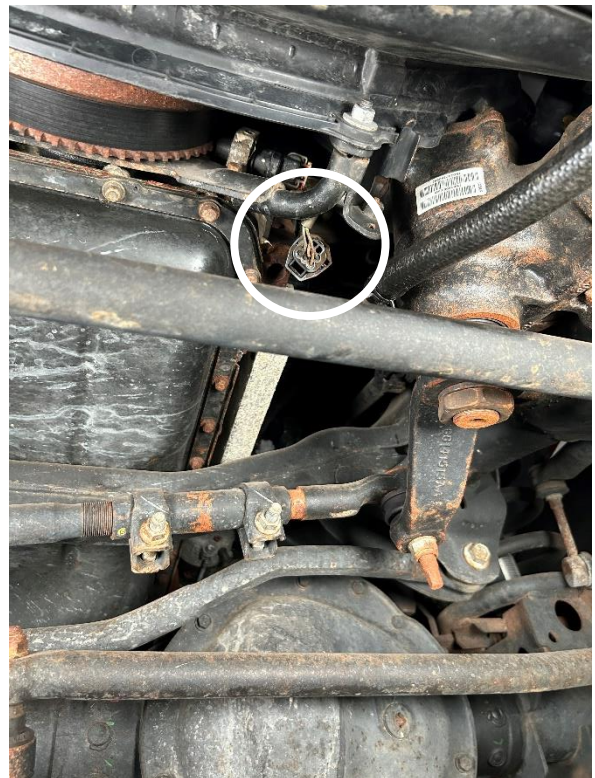

**STEP 3:** To replace the connections, cut and transfer one wire at a time to the new pigtail to ensure that the proper pin locations are maintained. Staggering the splices will allow for the harness to not become too large in a single area.

**STEP 4:** Use the included heat shrinkable butt splice connectors to crimp each end of the splice. Use a heat gun to seal each connection.

**STEP 5:** Reconnect the battery terminals. Check for proper function of the cooling fan.